


Features & Benefits

Calibrated sands and gravels are produced from high quality raw materials, carefully dried and screened. Extracted in our Dutch quarry in Selligen from geological formations formed in the Pleistocene. High silica content and hardness deliver wear resistance, with a low loss on ignition and uniformity coefficient, making silica sands ideal for a variety of applications.

Granulometric Data & Physical Characteristics

Sieve size (mm)	Typical in % through sieve
1,6 mm	100%
1,4 mm	99,9%
1,25 mm	98%
1,0 mm	28%
0,8 mm	2%
0,71 mm	0,2%
0,6 mm	0%
rest	traces

Specific gravity	2,65 g/cm ³
Particle density loose	1,5 g/cm ³
Particle density compacted	1,7 g/cm ³
Effective size (D10)	0,9 mm
Mean size (D50)	1,1 mm
Uniformity coefficient (Cu)	1,2
Structure	Closed
Soluble in acid	0,04%
Foreign matter	None
Hardness	7 Mohs

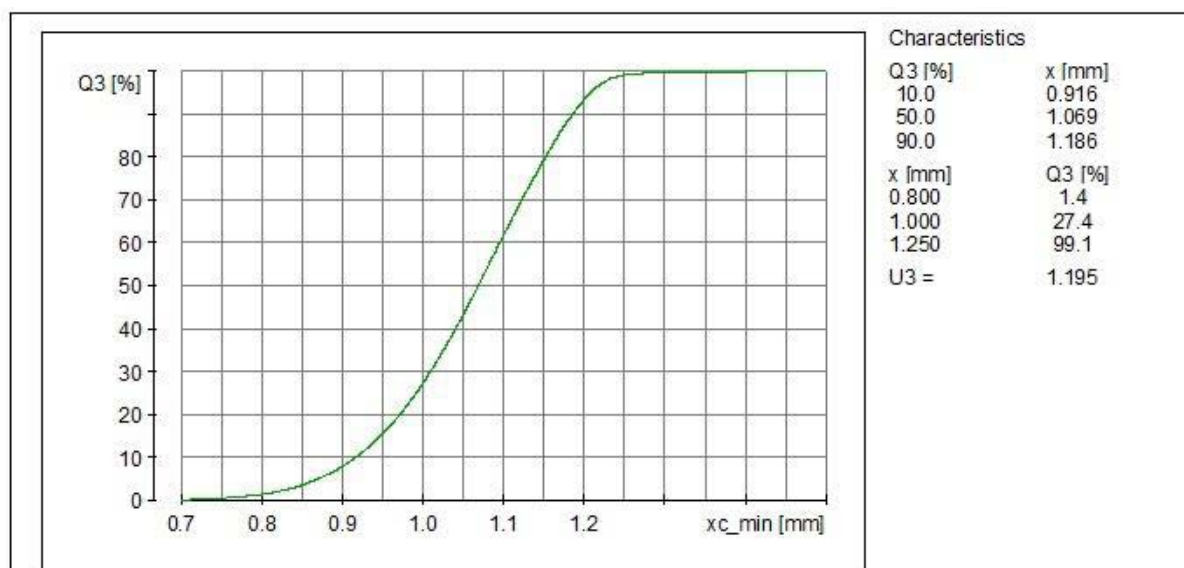

Chemical Analysis (XRF) %

Silicon	SiO ₂	99,1
Aluminium	Al ₂ O ₃	0,4
Potassium	K ₂ O	0,2
Iron	Fe ₂ O ₃	0,1
Sulfur	SO ₃	<0,02
Calcium	CaO	<0,02

Sodium	Na ₂ O	<0,02
Water	H ₂ O	<0,05
Magnesium	MgO	<0,02
Phosphorus	P ₂ O ₅	<0,02
Pfas	none	
loss of ignition	550 °C	<0,2

For Product Information & Customer Service

BUTA Curacao

Ajaxweg 15,
Willemstad, Curacao

Tel. +599 9 661 3806

E-mail: info@buta-curacao.com

The technical data presented here is for marketing purposes only and is not contractually binding, the data herein is determined using standard test methods. Since the product is based upon a naturally occurring material, we reserve the right to change this data when necessary. Safety information accompanying this product is available in the form of an SDS. All sales are undertaken strictly in accordance with our "General Conditions of Sale", available upon request, or by a written sales agreement duly signed by us.

